



Ares 12 LTE

LTE remote metering device with free portal for central Device management. SMS, Voice calls & Email Alarming included.



You can connect:

Up to 14 sensors

- Temperature (Pt1000)
- Relative Humidity
- Carbon dioxide
- Water Leak Detection
- Atmospheric pressure
- Current (4-20 mA)
- Voltage sensor

2× DI (Digital Inputs)

- Power presence
- Smoke detection
- Door contact

The Ares 12 LTE is cost-effective remote monitoring and alerting device for remote locations without LAN access. Connect up to 14 external sensors and 2 DI for external detectors with relay output.

Ares can be configured locally via USB or remotely from the HWg-cloud.com.

Ares can also be connected to any SensDesk portal.

SensDesk is remote Monitoring and Alerting system which can be installed on the customer's site. Ares continuously analyzes state and values of connected external sensors. When a value reaches the alarm threshold, Ares can be configured as standalone alerting device (sending Email, SMS or dials Voice Call).

Up to 14 external sensors

Connect up to 14 external sensor values (RJ11) bus (max. 60 metres). Sensors of current, voltage, temperature, light intensity, CO₂ and VoC are available.

Data graphs on the website

HWg-cloud.com or SensDesk service can receive data from the device and show value graphs. Data can be also sent in e-mail attachments or downloaded via USB.

5× E-mail / 5× SMS+Ring

User can be alerted from the device by email or by calling and texting up to 5 numbers. HWg-cloud or SensDesk can be also used for alerting.

2× DI for external detectors

To DI (Digital Input) you can connect 2 external detectors (0/1) with relay output. Detectors of smoke, air-flow, flood, power presence are available.

Remote configuration


The device can be configured remotely at the "AresConf" tab in the HWg-cloud or SensDesk portal.

Standalone / IoT Monitoring

Device can be used as standalone alerting unit with remote web configuration over HWg-cloud.com service. Or it can be IoT monitoring device, connected to the portal, where all alarming / reporting is realized from the portal.

Typical application examples

- Electricity distribution networks (transformer stations, lines)
- Water source monitoring, including technical equipment status
- Agricultural premises (greenhouses, granaries, etc.)
- Road, highway, or railroad technology
- Temperature and thermal expansion of structures
- Diesel generators – environment and status monitoring

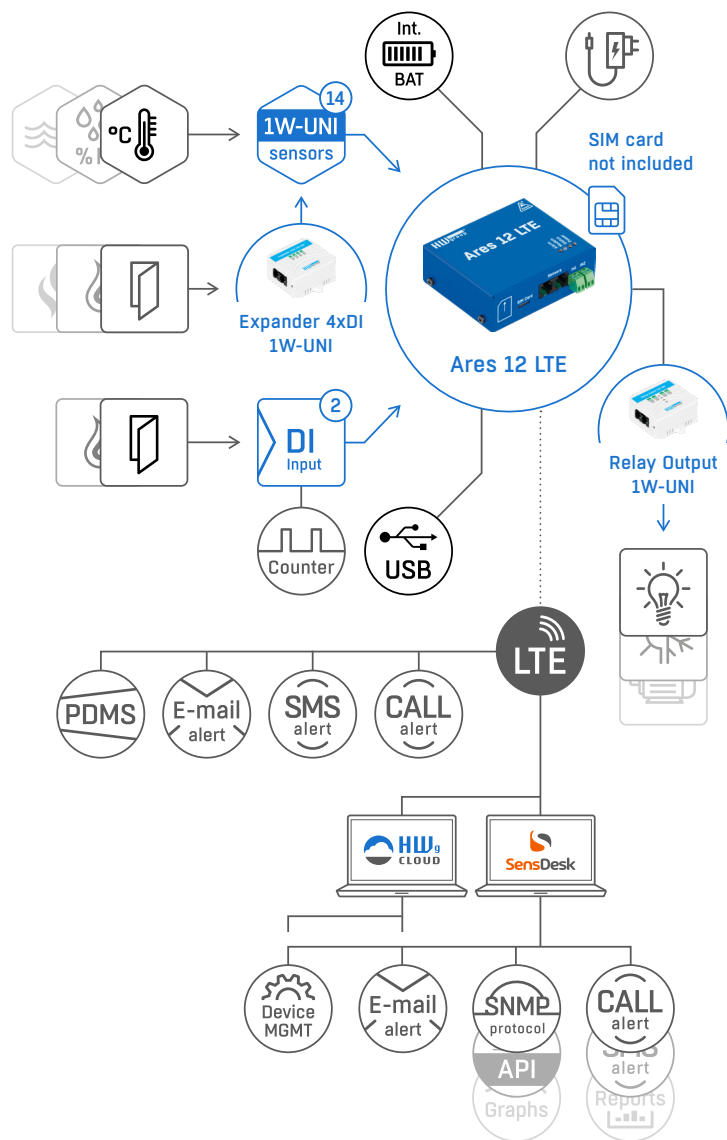

LTE Connections

Interface	FDD LTE bands: B1/B3/B5/B7/B8/B20 GSM bands: 900/1800 GPRS multi-slot class 12 Class 4 (33 dBm ±2 dB) for GSM900 Class 1 (30 dBm ±2 dB) for DCS1800 Class E2 (27 dBm ±3 dB) for GSM900 8-PSK Class E2 (26 dBm ±3 dB) for DCS1800 8-PSK Class 3 (23 dBm ±2 dB) for LTE FDD bands
Supported protocols	IP: TCP, UDP, HTTP, SMTP, HWg-PUSH
LTE limits	Voice call alerts from device require GSM 2G or 3G network coverage.

Sensors

Type	HWg original accessories: RJ11 sensors
Connector	2× RJ11 port (1-Wire UNI)
Sensors	Up to 14 sensor values
Sensor distance	Up to 60 m

Dry contact inputs

Port	I1, I2
Type	Digital Input (Dry contact) + Pulse counter
Sensitivity	1 (On) = 0-500 Ω (Right pin on the terminal block can be connected to 12 V GND)
Max. distance	Up to 50 m

Power input

Port	9-30 V DC
Type	Main device power input (typically 500 mA)
Connector	Jack (barrel, inner 2,1 mm outer 5,5 mm) + Terminal Block

Physical parameters

Temperature range	Operating: 5 to +50 °C (+41 to +122 °F) Storage: -25 to +85 °C (-13 to +185 °F)
Dimensions / Weight	76×93×31 mm / 150 g
EMC	FCC Part 15, Class B, CE - EN 55022, EN 55024, EN 61000

Differences between Ares 12 vs. Ares 10

	Ares 12	Ares 10
Sensor values	14×	6×
External Relay Outputs compatible	✓	✗
Internal rechargeable battery	✓	✗

Versions and related products

